



PB-02

VIDEO INTERCOM



- ⊕ Surface mounting
- ⊕ Construction in blocks
- ⊕ Digital name display
- ⊕ Up to 24 buttons
- ⊕ Hands-free reader
- ⊕ 12 keys backlit coded keypad



INSTALLATION MANUAL



4-buttons stainless steel finish intercom 27-3007

PB-02 20 buttons anthracite finish 27-0011



PUSH-BUTTON INTERCOM RANGE

		1 PUSH BUTTON INTERCOM WITHOUT KEYPAD	1 PUSH BUTTON INTERCOM WITH KEYPAD	1 PUSH BUTTON INTERCOM WITHOUT KEYPAD + 11-DOOR CENTRAL UNIT	1 PUSH BUTTON INTERCOM WITH KEYPAD + 11-DOOR CENTRAL UNIT
4 call buttons	■ Anthracite finish	27-0001	27-0007	28-0001	28-0007
8 call buttons	■ Anthracite finish	27-0002	27-0008	28-0002	28-0008
12 call buttons	■ Anthracite finish	27-0003	27-0009	28-0003	28-0009
16 call buttons	■ Anthracite finish	27-0004	27-0010	28-0004	28-0010
20 call buttons	■ Anthracite finish	27-0005	27-0011	28-0005	28-0011
24 call buttons	■ Anthracite finish	27-0006		28-0006	

DESCRIPTION and TECHNICAL SPECIFICATIONS

INTERCOM

DIMENSIONS	4 to 8 buttons	W 118 mm
	12 to 24 buttons	W 225 mm
	3 modules (Camera / Call buttons / Reader)	H 300 mm
	4 modules (Camera / Call buttons / Keypad / Reader)	H 400 mm D 27 mm
ENVIRONMENT	Operating temperature	-20°C to +60°C
	Index Protection	IP53 / IK08
ACCESS CONTROL EQUIPMENT	Coded keypad	Optional
	Hands-free reader	✓
INSTALLATION	Outdoor / Indoor	✓
	Surface-mounted	✓
ADDITIONAL INFORMATION	Accessibility Needs compliant	✓
	Hearing loop	✓
	Backlit display	✓
	Display: 2 lines of 16 characters each	✓
	Time taken to connect	40 sec.
	Braille keypad	If keypad option
	Name or flat number displayed on time slots	✓
	Functional messages: (call in progress, etc.) Voice synthesis + display	✓
	Anti-disturbance (I)	✓
	Sound level adjustment without dismantling	✓
	Automatic call return if no answer	✓

CENTRAL UNITS

CENTRAL UNIT CHARACTERISTICS	Maximum number of dwellings managed	24
	Power supply recommended (not included)	12 VDC 5A - 24 VDC 2,5A
SYSTEM	Number of relays	1 (+3)

SERVICE PACKAGE CHOICE

Once you've selected your equipment, take out the package of your choice to ensure the intercom's functionality.

DON'T FORGET TO ADD YOUR SERVICE PACKAGE !


CLASSIC SERVICE PACKAGE

PREPAID 15 YEARS ALL INCLUSIVE PACKAGE

See pages XX and XX TO DISCOVER THE OFFERS

4G-IP MODULE CHARACTERISTICS	4G-IP module	Deported
	Number of intercom(s) per 4G-IP module (video)	1 to 3 (depending on the type of central unit)

SIMPLIFIED SCHEME* and WIRING

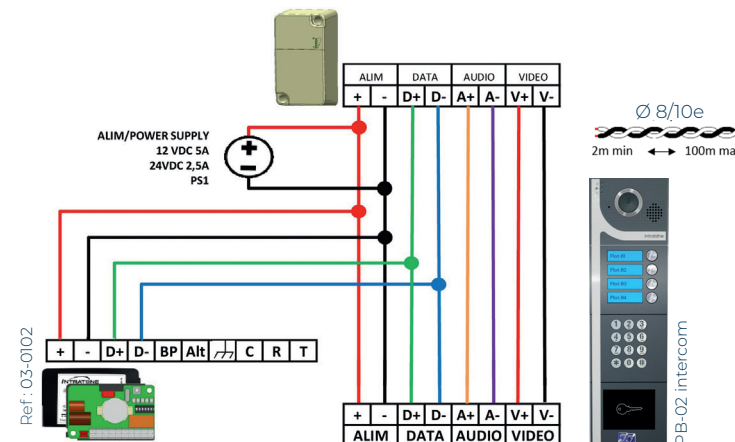

	1 door - 03-0102
4G-IP module Central unit	4 wires (2 twisted pairs)
Central unit Intercom	4 wires (2 twisted pairs)
Intercom 4G-IP module	4 wires (2 twisted pairs)

*1-door central unit scheme.