




SC-01 RENO

VIDEO INTERCOM

- + Ideal for replacing a coded keypad
- + Choice of 3 finishes
- + Flush-mounted installation, surface-mounted box option
- + Proximity reader
- + 12 keys backlit coded keypad

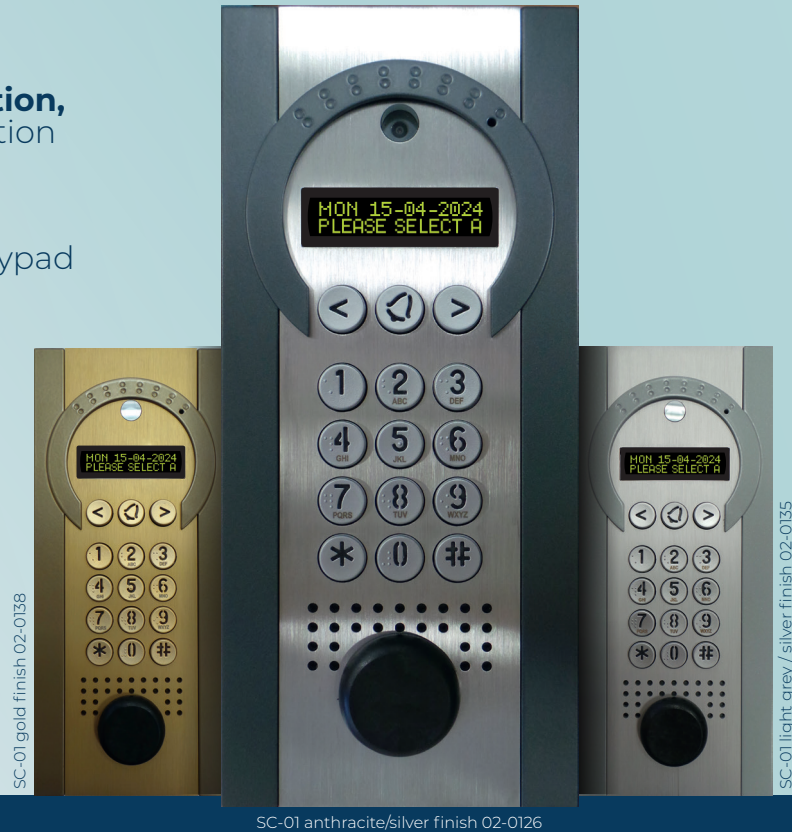

INSTALLATION MANUAL



SC-01 VIDEO INTERCOM RANGE

		1 INTERCOM	1 INTERCOM + 1-DOOR CENTRAL UNIT // 200 NAMES	1 INTERCOM + 2-DOORS CENTRAL UNIT // 1,000 NAMES
SC-01	■ Anthracite / silver finish	02-0126	02-0127	02-0128
	■ Light grey / silver finish	02-0135	02-0136	02-0137
	■ Gold finish	02-0138	02-0139	02-0140

ACCESSORIES



Surface-mounted box

	■ Anthracite / silver finish	12-0134	W 125.50 x H 273.50 x D 70 mm
	■ Light grey / silver finish	12-0140	
	■ Gold finish	12-0141	

INTERCOM

DIMENSIONS (W x H x D)	SC-01 intercom	120 x 270 x 15 mm
	SC-01 intercom back box	96 x 244 x 45 mm
ENVIRONMENT	Operating temperature	-20°C to +60°C
	Indice Protection	IP54 / IK08
ACCESS CONTROL EQUIPMENT	Coded keypad	✓
	Reader	✓
	Outdoor / Indoor	✓
INSTALLATION	Flush-mounted (24 mm thick)	✓
	Surface-mounted	Surface-mounted box available as an add-on product
ADDITIONAL INFORMATION	Accessibility Needs compliant	✓
	Time taken to connect	40 sec.
	Configurable welcome message (64 scrolling or static characters)	✓
	Accelerated alphabetical searching	✓
	Name or flat number displayed on time slots	✓
	Display: 2 lines of 16 characters each	✓
	Functional messages: (call in progress, etc.) Voice synthesis + display	✓
	Anti-disturbance (I)	✓
	Sound level adjustment without dismantling	✓
	Automatic call return if no answer	✓

CENTRAL UNITS

CENTRAL UNIT CHARACTERISTICS	Maximum number of dwellings managed	200	1,000
	Power supply recommended (not included)	12 VDC 5A - 24 VDC 2,5A	
SYSTEM	Number of relays	1 (+3)	2 (+2)

SERVICE PACKAGE CHOICE

Once you've selected your equipment, take out the package of your choice to ensure the intercom's functionality.

DON'T FORGET TO ADD YOUR SERVICE PACKAGE !


CLASSIC SERVICE PACKAGE

PREPAID 15 YEARS ALL INCLUSIVE PACKAGE

See pages XX and XX TO DISCOVER THE OFFERS

4G-IP MODULE CHARACTERISTICS	4G-IP module	Deported
	Number of intercom(s) per 4G-IP module (video)	1 to 3 (depending on the type of central unit)

SIMPLIFIED SCHEME* and WIRING

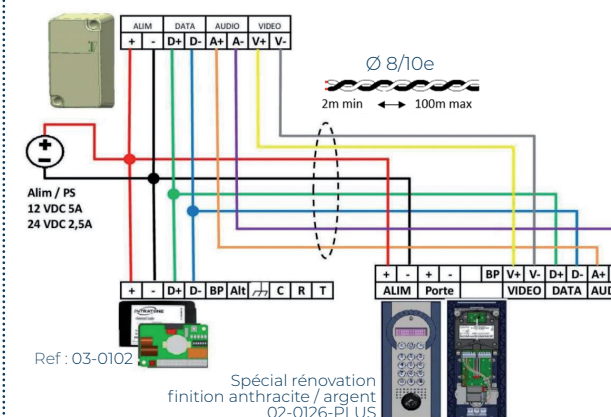

	1 door - 03-0102	2 doors - 03-0101
4G-IP module Central unit	4 wires (2 twisted pairs)	6 wires (3 twisted pairs)
Central unit Intercom	4 wires (2 twisted pairs)	6 wires (3 twisted pairs)
Intercom 4G-IP module	4 wires (2 twisted pairs)	2 wires (1 twisted pair)

*1-door central unit scheme.
To view the 2-doors central unit scheme, you can scan the installation manual QR code

➔ MORE INFORMATION ON CENTRAL UNITS ? See pages XX and XX

SCROLLING INTERCOM