



SC-04 VENDONE[®]

VIDEO INTERCOM

- Customizable** intercom
- Flush-mounted installation**, surface-mounted box option
- Colour LCD display** with sensor for brightness adjustment
- Pinhole** camera
- Handsfree** reader
- 12 keys** backlit coded keypad



INSTALLATION MANUAL



SC-04 VENDONE[®] VIDEO INTERCOM RANGE

		1 INTERCOM	1 INTERCOM + 1-DOOR CENTRAL UNIT // 200 NAMES	1 INTERCOM + 2-DOORS CENTRAL UNIT // 1,000 NAMES
Vendone [®]	Stainless steel finish	02-0301	02-0307	02-0305
	Brass finish	02-0302	02-0308	02-0306
Vendone [®] Keysafe	Stainless steel finish	02-0314	02-0316	02-0315

ACCESSORIES (Excluding Vendone[®] Key Safe)

	Protective cap	Stainless steel finish	12-0202	W 155.50 x H 345.20 x D 35 mm
		Stainless steel finish	12-0201	W 156.50 x H 349.60 x D 50 mm
		Brass finish	12-0205	

INTERCOM

DIMENSIONS (W x H x D)	Vendone [®] intercom	150 x 343 x 2,50 mm
	Vendone [®] Intercom key safe	150 x 531 x 51 mm
	Vendone [®] back box	127.40 x 318 x 45 mm
	Vendone [®] key safe back box	127.40 x 505.60 x 51 mm
ENVIRONMENT	Operating temperature	-20°C to +60°C
	Index Protection	IP54 / IK08
ACCESS CONTROL EQUIPMENT	Coded keypad	✓
	Hands-free reader	✓
INSTALLATION	Outdoor / Indoor	✓
	Flush-mounted	✓
ADDITIONAL INFORMATION	Surface-mounted	Surface-mounted box available as an add-on product
	Accessibility Needs compliant	✓
	Hearing loop	✓
	Braille keypad	✓
	Time taken to connect	40 sec.
	Accelerated alphabetical searching	✓
	Name or flat number displayed on time slots	✓
	7 x 5.3 cm colour LCD screen	✓
	Functional messages: (call in progress, etc.) Voice synthesis + display	✓
	Anti-disturbance (I)	✓
	Sound level adjustment without dismantling (depending on the associated central unit)	✓
	Automatic call return if no answer	✓

CENTRAL UNITS

CENTRAL UNIT CHARACTERISTICS	Maximum number of dwellings managed	200	1,000
	Power supply recommended (not included)	12 VDC 5A - 24 VDC 2,5A	
SYSTEM	Number of relays	1 (+3)	2 (+2)

SERVICE PACKAGE CHOICE

Once you've selected your equipment, take out the package of your choice to ensure the intercom's functionality.

DON'T FORGET TO ADD YOUR SERVICE PACKAGE !


CLASSIC SERVICE PACKAGE

PREPAID 15 YEARS ALL INCLUSIVE PACKAGE

See pages XX and XX TO DISCOVER THE OFFERS

4G-IP MODULE CHARACTERISTICS	4G-IP module	Deported
	Number of intercom(s) per 4G-IP module (video)	1 to 3 (depending on the type of central unit)

SIMPLIFIED SCHEME* and WIRING

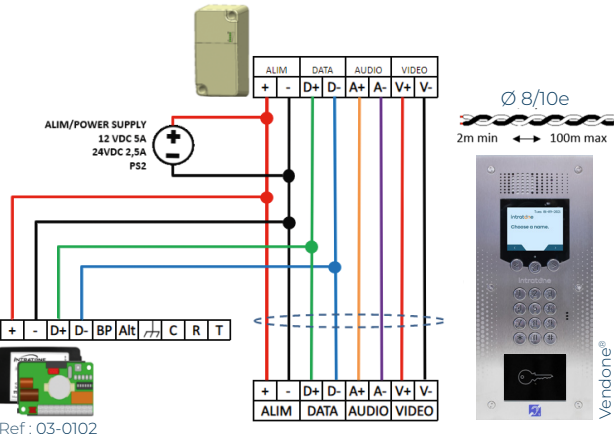

	1 door - 03-0102	2 doors - 03-0101
4G-IP module Central unit	4 wires (2 twisted pairs)	6 wires (3 twisted pairs)
Central unit Intercom	4 wires (2 twisted pairs)	6 wires (3 twisted pairs)
Intercom 4G-IP module	4 wires (2 twisted pairs)	2 wires (1 twisted pair)

*1-door central unit scheme. To view the 2-doors central unit scheme, you can scan the installation manual QR code