



Video intercom specially for renovations

- Ideal to **replace a coded keypad**
- Choice of **3 finishes**

VIDEO INTERCOM DESIGNED SPECIALLY FOR RENOVATIONS
 With name scroll, pinhole camera, 12-button backlit coded keypad and proximity reader - Flush mounting



Anthracite / silver finish




Light grey / silver finish



Gold finish

RANGE

INTERCOM ONLY	
02-0126	Anthracite / silver finish
02-0135	Light grey / silver finish
02-0138	Gold finish
FULL 200-USER KIT: 1 INTERCOM + 1 CENTRAL UNIT 1-DOOR (03-0102)	
02-0127	Anthracite / silver finish
02-0136	Light grey / silver finish
02-0139	Gold finish
FULL 1000-USER KIT: 1 INTERCOM + 1 CENTRAL UNIT 2-DOOR (03-0101)	
02-0128	Anthracite / silver finish
02-0137	Light grey / silver finish
02-0140	Gold finish
ACCESSORIES	
12-0134	Surface box - Anthracite / silver finish
12-0140	Surface box - Light grey / silver finish
12-0141	Surface box - Gold finish

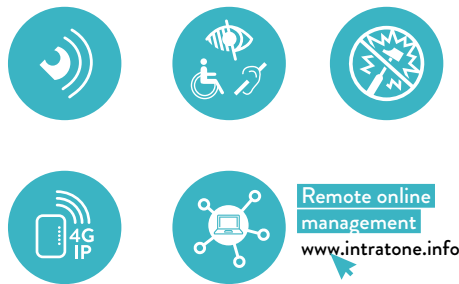

Remote online management
www.intratone.info

Don't forget to add your service package!

CLASSIC
Service package

- REMOTE MANAGEMENT PLATFORM
- AUTO COMMUNICATIONS
- VIDEO COMMUNICATIONS
- 10 YEARS WARRANTY ON THE EQUIPMENT
- DIGITAL NOTICES BOARD
- EQUIPMENT RENTAL

PREPAID
15-years package

- REMOTE MANAGEMENT PLATFORM
- AUTO COMMUNICATIONS
- VIDEO COMMUNICATIONS
- 10 YEARS WARRANTY ON THE EQUIPMENT
- DIGITAL NOTICES BOARD
- EQUIPMENT INCLUDED

DESCRIPTION

	1 door	2 doors
CENTRAL UNIT	03-0102	03-0101
Max number of apartments managed	200	1000
SYSTEM		
Number of relays	1 (+3)	2 (+2)
CONNECTION		
4G-IP module	✓	✓
4G-IP MODULE CHARACTERISTICS		
Remote 4G-IP module	✓	✓
Possibility to add a remote camera	✓	✓
Max number of intercoms per module	1	1
Service package included	Upon request	Upon request
ACCESS CONTROL EQUIPMENT		
Coded keypad	✓	✓
Proximity reader	✓	✓
MOUNTING		
Flush-fit mounting (24 mm thick)	✓	✓
FINISHES		
Anthracite/silver	✓	✓
Light grey / silver	✓	✓
Gold	✓	✓

Call length	40 sec.
Customizable welcome message (64 characters - scrolling or fixed)	✓
Fast alphabetical research	✓
Suitable for all	✓
Call sheet display (apartments) during time slots	✓
Display : 2 lines of 16 characters	✓
Operational messages : (call in progress...)	✓
Speech synthesis	✓
Anti-disturbance ⁽¹⁾	✓
Sound level adjustment without dismantling	✓
Automatic call return if no answer	✓

(1) System ensuring that a resident is not disturbed by repetitive calls

TECHNICAL CHARACTERISTICS

POWER SUPPLY

Central Unit **12 V DC 5A - 24 V DC 2,5A**

WIRING

1 DOOR CENTRAL UNIT 03-0102

4G-IP module - Central unit

4 wires (2 twisted pairs) - Ø 8/10e - Max distance: 100m

Central unit - Intercom

4 wires (2 twisted pairs) - Ø 8/10e - Max distance: 100m

Intercom - 4G-IP module

4 wires (2 twisted pairs) - Ø 8/10e - Max distance: 100m

2 DOORS CENTRAL UNIT 03-0101

4G-IP module - Central unit

6 wires (3 twisted pairs) - Ø 8/10e - Max distance: 100m

Central unit - Intercom

6 wires (3 twisted pairs) - Ø 8/10e - Max distance: 100m

Intercom - 4G-IP module

2 wires (1 twisted pair) - Ø 8/10e - Max distance: 100m

DIMENSIONS (L x H x D)

INTERCOM

120 x 270 x 15 mm (+ thickness of the prox. reader - 4,5 mm)

FLUSH FIT WALL BOX

96 x 244 x 45 mm

ADDITIONAL WALL BOX FOR FLUSH-FIT MOUNTING

125,50 x 273,50 x 70 mm

ENVIRONMENT

Working environment for the intercom :

-20° C to +60° C

Protection class **IP54**

External fitting

SIMPLIFIED SCHEMATIC

