



Coded keypad - managed in realtime


- To control an insulated door
- Same look & feel as the intercom range
- Change codes and manage key fobs remotely

CODED KEYPAD
coded keypad with 12-backlit buttons and either a push button or a proximity reader



CODED KEYPAD PRODUCT RANGE

CODED KEYPAD ONLY	
04-0101	Coded keypad with 12 backlit buttons and a push button - stainless steel finish
04-0103	Coded keypad with 12 backlit buttons and a proximity reader - stainless steel finish
INTRABOX RANGE	
06-0103	INTRABOX ECO DATA CODED KEYPAD: 12 digit backlit coded keypad with push button (04-0101) + 1 relay card (12-0110) + 1 transmission module, unlimited data updates for 10 years
06-0104	INTRABOX ECO DATA CODED KEYPAD AND PROXIMITY READER: 12 digit backlit coded keypad with proximity reader (04-0104) + 1 door central unit (03-0102) + 1 transmission module, unlimited data updates for 10 years
ACCESSORIES	
12-0103	Surface box for coded keypad - Surface mounted - Stainless steel

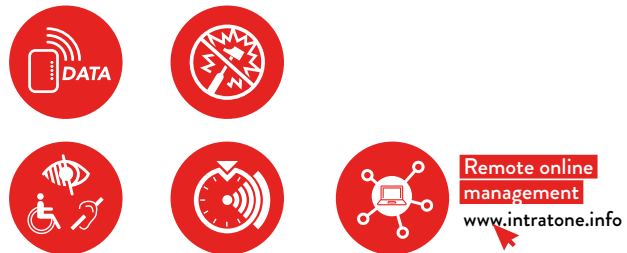


TECHNICAL CHARACTERISTICS


POWER SUPPLY	For coded keypad through central unit 12 to 24 VDC
WIRING	Central unit - Coded keypad 4 wires (2 twisted pairs) - Ø 8/10e - Max distance: 200 m
DIMENSIONS (L x H x D)	Coded keypad 120 x 190 x 25 mm Wall box 91 x 160 x 37 mm Round proximity reader Ø 40 x 7 mm
ENVIRONMENT	Operation temperature : -20°C to +70°C Protection class Keypad IP55

SIMPLIFIED SCHEMATIC

Coded keypad
04-0101



Coded keypad
with prox. reader
04-0103

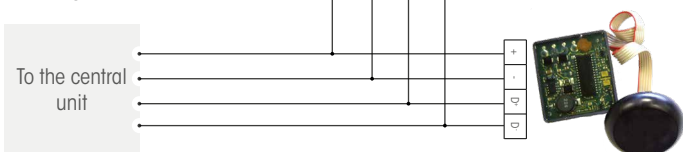

MANAGEMENT TYPE	
Real-time (with a transmission module)	✓
MANAGEMENT	
1-door controller (with central unit 03-0102)	✓
FEATURES (according to the central unit)	
Free access time slots	✓
Event log	✓
Master key	✓
Alerts	✓
Code	40
Coded keypad with proximity reader (04-0103)	
Max number of key fobs (depending on centrale unit)	1 000 / 7 000